

## CS 508ci

**Pages Per Minute:** Color and Black – Letter: 52 ppm, Legal: 42 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.3 Seconds or Less Black, 6.2 Seconds or Less Color

Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 0.71 kWh/week; 220V: 0.67 kWh/week

**Weight:** 109 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 150,000 Pages per Month

**Dimensions:** 21.65" W x 21.65" D x 24.13" H

## CS 408ci

**Pages Per Minute:** Color and Black – Letter: 42 ppm, Legal: 34 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.8 Seconds or Less Black, 6.9 Seconds or Less Color

Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 0.59 kWh/week; 220V: 0.55 kWh/week

**Weight:** 109 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 150,000 Pages per Month

**Dimensions:** 21.65" W x 21.65" D x 24.13" H

## CS 358ci

**Pages Per Minute:** Color and Black – Letter: 37 ppm, Legal: 30 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.9 Seconds or Less Black, 7.3 Seconds or Less Color

Print: 5.5 Seconds or Less Black, 6.5 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 1.86 kWh/week; 220V: 1.66 kWh/week

**Weight:** 104.5 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 100,000 Pages per Month

**Dimensions:** 21.65" W x 19.96" D x 29.13" H

## CS 308ci

**Pages Per Minute:** Color and Black – Letter: 32 ppm, Legal: 26 ppm,

**Warm Up Time:** 20 Seconds or Less (Power On)

**First Page Out:**

Copy: 6.4 Seconds or Less Black, 7.8 Seconds or Less Color

Print: 7.0 Seconds or Less Black, 8.0 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 1.55 kWh/week; 220V: 1.43 kWh/week

**Weight:** 109.3 lbs (includes Standard RADF)

**Maximum Monthly Duty Cycle:** 100,000 Pages per Month

**Dimensions:** 21.65" W x 19.96" D x 29" H (includes RADF)

## Specifications

### Basic Specifications

**Configuration:** Color Multifunctional System – Print/Scan/Copy/Optional Fax

**Duplex:** Standard Stackless Duplex Supports Statement to Legal (5.5" x 8.5" – 8.5" x 14"), 16 lb Bond – 120 lb Index (60 – 220gsm)

**Display:**

New 7" 800 x 480 dot Color Touch Screen Control Panel<sup>1</sup>  
7" Color Touch Screen Control Panel<sup>2</sup>

**Resolution:** 600 x 600 dpi; 1200 x 1200 dpi  
(At reduced speed)

**Memory:** 4GB Standard<sup>1</sup> / 1.5GB Standard  
(3GB Maximum)<sup>2</sup>

**Hard Disk Drive:** 320GB HDD Standard<sup>1</sup>  
Optional 32GB (HD-6) or 128GB (HD-7) SSD<sup>2</sup>

**Standard Output Tray:**

Statement – Legal: 500 sheets; up to 8.5" x 48" Banner  
Single Sheet<sup>1</sup> / Statement – Legal 500 Sheets<sup>2</sup>

**Electrical Requirements:** 120V, 60Hz, 8.5A, 8.9A, 10.2A,  
10.5A; 220-240V, 50Hz, 5.4A

**Dimensions:** 21.65" W x 19.96" D x 29.13" H (includes RADF)

### Print Specifications

**Standard Controller:** Freescale QorIQ T1024 / 1.0GHz<sup>1</sup>  
Main: SoC (PPC465S) 1GHz<sup>2</sup>

**PDLs / Emulations:** PRESCRIBE, PCL6 (PCL-XL / PCL5c),  
KPDLL3 (PS3), XPS, OPEN XPS

**Optional (UG-34):** IBM ProPrinter, Line Printer, LQ-850

**Print Resolution:** Up to 1200 x 1200 dpi (At reduced speed)

**Interfaces:** Standard: 10/100/1000BaseTX, Hi-Speed USB  
2.0, 3 USB Host Interfaces (2 USB Host Interfaces for the  
308ci), 2 Expansion Slots

### Scan Specifications

**Scan Speeds (mono/color) A4,LTR @ 300 dpi:**

**DP-5100<sup>3</sup>:** Simplex: 60, 62 ipm BW / 60, 62 ipm Color;

Duplex: 26, 27 ipm BW / 26, 27 ipm Color

**DP-5120<sup>3</sup>:** Simplex: 60, 62 ipm BW / 60, 62 ipm Color;

Duplex: 120, 124 ipm BW / 120, 124 ipm Color

**DP-5130<sup>3</sup>:** Simplex: 85, 87 ipm BW / 65, 67 ipm Color;

Duplex: 170, 174 ipm BW / 130, 134 ipm Color

### Copy Specifications

**Job Management:** 1,000 Department Codes<sup>1</sup> /  
100 Department Codes<sup>2</sup>

### Optional Document Processors<sup>3</sup>

**Type / Capacity:**

**DP-5100<sup>3</sup>:** Reversing Automatic Document Processor / 75  
Sheets

**DP-5120<sup>3</sup>:** Dual Scan Document Processor / 100 Sheets

**DP-5130<sup>3</sup>:** Dual Scan Document Processor / 270 Sheets

**Acceptable Originals:**

5.5" x 8.5" – 8.5" x 74.8" (1900mm)<sup>1</sup>

5.5" x 8.5" – 8.5" x 36" (915mm)<sup>2</sup>

**Acceptable Weights:**

**DP-5100<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

**DP-5120<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

**DP-5130<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

### Optional Fax Processors

**Fax Type:** Fax System 10(X)<sup>1</sup> / Fax System 11<sup>2</sup>

**Fax Memory:** Standard 170 MB (No scalability: Maximum  
170 MB)<sup>1</sup> / 3.5 MB<sup>2</sup>

### Optional 1,000 Sheet Finisher DF-5110<sup>1,5,6</sup>

**Stack / Staple Capacity:**

**Main Tray:** 1,000 Sheets (up to 80gsm) / 50 Sheets  
(up to 24 lb Bond [90gsm])

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Top Left, Bottom Left,  
Center Bind

**Optional Punch:** PH-5100 2 and 3 Hole Punch Unit,  
Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index  
(60 – 220gsm)

**Dimensions:** 23.27" W x 20.35" D x 39.58" H

### Optional 3,200 Sheet Finisher DF-5120<sup>1,5,6</sup>

**Stack / Staple Capacity:** Main Tray (A): 3,000 Sheets; Sub  
Tray (B): 200 Sheets / 50 Sheets

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Top Left, Bottom Left,  
Center Bind

**Standard Punch:** PH-5100 2 and 3 Hole Punch Unit,  
Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index  
(60 – 220gsm)

**Dimensions:** 25.59" W x 20.94" D x 42.35" H

### Additional Options

**Common for 508ci / 408ci / 358ci / 308ci:**


Job Separator<sup>3</sup> (JS-5100), Job Separator<sup>2</sup> (JS-5100),  
Scan Extension Kit (A) for Searchable PDF/OCR,  
Bridge Unit Attachment Kit (AK-5100), ThinPrint (UG-33),  
Document Tray (DT-5100), Card Authentication Kit (B),  
5 Bin Mailbox (MT-5100), Card Reader Holder (11),  
Wireless Card IB-50, Wireless Card IB-51

**Only available for 508ci/408ci/358ci**

Internet Fax Kit (A), Emulation (UG-34), Key Counter,  
Key Counter Attachment Kit

**Only available for 308ci:**

SD Card4 (16 or 32GB), Scan Extension Kit,  
Wireless Card IB-35, Standard Data Security Kit - (HD-6  
or HD-7 is required)

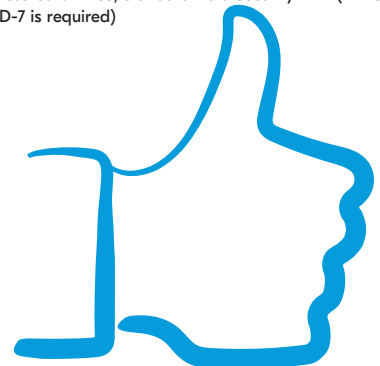

# COPYSTAR

KYOCERA TECHNOLOGY

The CS 508ci Series are compact, highly scalable, multifunction systems that streamline your document processing. A host of intelligent features boost productivity, from robust paper handling and advanced finishing to a standard security kit.

## Additional Specifications

### Security Specifications

**Standard:** Local Authentication, Network Authentication, IPsec, SNMPv3, IEEE802.1x, IPP over SSL/TLS, HTTPS, FTP over SSL/TLS, SMTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD over SSL/TLS, LDAP over SSL/TLS

**Data Security Function:** HDD Overwrite Mode, HDD Data Encryption

### Print Specifications

**Fonts:** 136 KPDLL3, 93 PCL6, 8 Windows Vista, 1 Bitmap

**OS Compatibility:** Windows: 7/8/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019

**Mac:** OS Compatibility: Mac OS 10.9 and later, AirPrint Enabled

**Mobile Printing:** Apple AirPrint®, Google Cloud Print™, Mopria®, KYOCERA Mobile Print

Optional: 10/100/1000BaseTX (IB-50 for Dual NIC);  
Optional: IEEE 802.11 b/g/n (IB-51 for Wireless LAN Interface)

IEEE 802.11 b/g/n (IB-35 for Wireless LAN Interface)<sup>2</sup> Comes standard with IB-35<sup>1</sup>

**Network Print and Supported Protocols:** TCP/IP, IPv4, IPv6; HTTP, LPD, FTP, IPP, RawPort, LLTD, SNT, DHCP, SMTP, POP3, DNS, SNMPv1/v2, WSD Scan/Print

**Drivers:** KX Driver, PCL Mini Driver, KPDLL Mini Driver, KX Driver for XPS, Network Fax Driver, TWAIN Driver, WIA Driver, PPD for MAC, PPD for Linux

**Utilities:** KYOCERA Net Manager, KYOCERA Net Viewer, KYOCERA Capture Manager, Command Center RX

### Paper Supply

**Standard Paper Sources:** Single 500 Sheet Tray, 100 Sheet MPT

#### Optional Paper Sources:

500 Sheet Tray (PF-5120), Dual 500 Sheet Trays (PF-5130)<sup>4</sup>; 2,000 Sheet Large Capacity Tray (PF-5140)<sup>4</sup>

**Paper Capacity:** Standard: 600 Sheets;  
Maximum: 3,100 Sheets

#### Paper Size:

Tray 1 – PF-5120 and PF-5130: 5.5" x 8.5" – 8.5" x 14" (Statement to Legal); PF-5140: 8.5" x 11" (Multiple Sheets)  
MPT: 5.5" x 8.5" – 8.5" x 14" (up to 1220mm/ up to 48inch Single Sheet<sup>1</sup> / up to 356mm Multiple Sheets<sup>2</sup>)

**Paper Weight:** Trays/MPT: 16 lb Bond – 120 lb index (60 – 220gsm)

**Input Materials:** Standard/Optional Drawer: Plain Paper, Bond Paper, Recycled Paper, Envelopes; MPT: Plain Paper, Bond Paper, Recycled Paper, Cardstock, Transparencies, Labels, Envelopes

### Scan Specifications

**File Formats:** TIFF (MMR compression), PDF (MMR compression), PDF (high compression), OpenXPS, XPS, JPEG

**PDF Extension:** Searchable PDF (OCR) Option

#### Connectivity / Supported Protocols:

10/100/1000BaseTX, TCP/IP, Hi-Speed USB 2.0

**Scanning Functions:** Scan to Folder (SMB), Scan to e-Mail, Scan to FTP, Scan to FTP over SSL, Scan to USB, WSD Scan, TWAIN Scan

**Original Size:** Through DP: Statement to Banner (5.5" x 8.5" – 8.5" x 72 inch)

Glass: Statement to Legal (5.5" x 8.5" – 8.5" x 14 inch)

### Copy Specifications

**Copy Resolution:** 600 x 600 dpi

**Image Mode:** Text, Photo, Text/Photo, Graphic/Map

**Continuous Copy:** 1 – 9999<sup>1</sup>, 1 – 999<sup>2</sup> / Auto Reset to 1

**Additional Features:** Auto Magnification, Auto Paper Select, Auto Start, Auto Drawer Change, Interrupt Copy

**Magnification / Zoom:** Full Size, 5 Reduction<sup>1</sup>, 7 Reduction<sup>2</sup>, 5 Enlargement Preset Ratios, 25-400% in 1% step increments

**Document Box:** Custom Box, Job Box, Removable Memory Box, Fax Box (with optional Fax System)

### Optional Fax Specifications

**Compatibility / Data Compression:** Super G3 Fax / MMR, MR, MH, JBIG

**Transmission Speed / Modem Speed:** Less than 3 seconds / 33.6 Kbps

**Driver:** Network Fax Driver

**Fax Functions:** Network fax, duplex transmission and reception, encrypted transmission and reception, polling transmission and reception, broadcast

## Output & Finishing Options

### Optional 300 Sheet Internal Finisher DF-5100<sup>5</sup>

#### Stack / Staple Capacity:

300 Sheets / 50 Sheets (up to 21 lb Bond [80gsm])

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Front 1 staple, Edge 1 staple, Face 2 staple

**Dimensions:** 19.13" W x 15.55" D x 6.22" H

<sup>1</sup> Only available for the CS 508ci / 408ci / 358ci model

<sup>2</sup> Only available for the CS 308ci model

<sup>3</sup> Comes standard on the CS 308ci model

<sup>4</sup> Requires PF-5120

<sup>5</sup> Only 1 output option can be installed

<sup>6</sup> Requires Bridge Unit Attachment Kit (AK-5100)

<sup>7</sup> Only 1 Document Processor can be installed



Specifications and design are subject to change without notice. For the latest on connectivity visit [copystar.com](http://copystar.com). Copystar, KYOCERA Net Manager, and Command Center RX are trademarks of the Kyocera Companies. AirPrint is a trademark of Apple, Inc. Google Cloud Print is a trademark of Google, Inc. Mopria is a trademark of Mopria Alliance, Inc. All other trademarks are the property of their respective owners.

KYOCERA Document Solutions America, Inc.  
Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA  
©2020 KYOCERA Document Solutions America, Inc.  
v012420

